

2

YEAR
WARRANTY

Tactic

ELECTRONIC PANEL HEATER

TACTIC CONVECTION HEATING PANEL IS VERY VERSATILE, EASY TO USE IN ALL RESIDENTIAL APPLICATIONS AS WELL AS IN COMMERCIAL OR INDUSTRIAL ENVIRONMENTS.

Tactic – designed for direct natural convection

The Tactic panel heater create direct and instant heat within a room. Cool air is conveyed from below into the heater where it is heated by specially-shaped aluminium wing radiators and then evenly discharged back into the room through the slatted air-outlet grille.

Heaters can be used anywhere heating is required. They allow areas such as living, dining, hallways, rumpus rooms, bedrooms, bathrooms, enl suites etc. to be quickly and effectively heated.


Heaters are plug-in, wall-mounted and can be easily installed. They are available in a choice of five models (500, 1000, 1500, 2000, & 2400W).

1 Bch. & (\$\$K fYei jFYg'dYfa UbYbhVcbbYVcb"



AIRELEC

Tactic

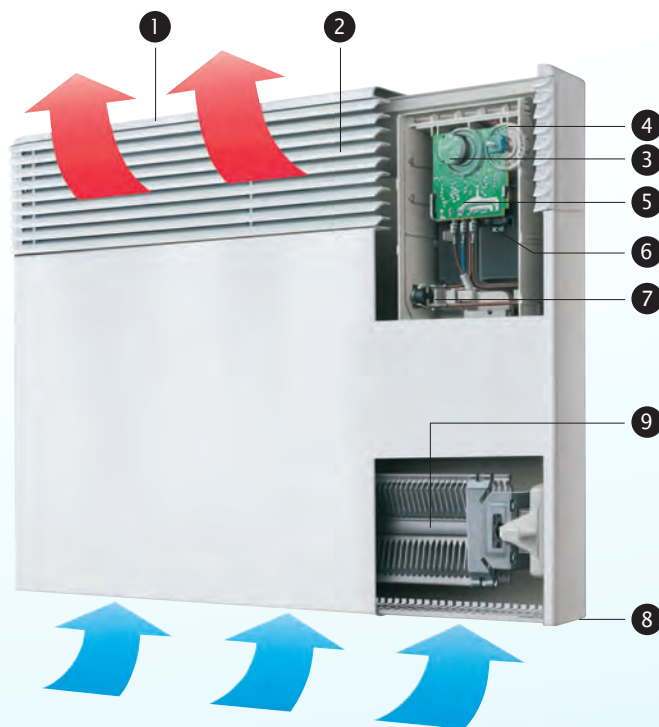

Hactic: cut-away

- 1 Epoxy-coated housing
- 2 Slatted air-outlet grille
- 3 Selection switch:
* = normal mode
▶ = lowered by 4°C
0 = off
- 4 Potentiometer for setting the desired room temperature
(★- 9 ± 5-35°C)
- 5 Room temperature controlled with electronic circuit board
- 6 Power triac (for noiseless switching)
- 7 Safety temperature monitor
- 8 Room temperature sensor (concealed in rear wall of the heater)
- 9 Specially-shaped "RX-Silence" aluminium wing radiator

Colour: RAL 9016 white
IP21 Drip-proof



CHARACTERISTICS

- Slimline design
- White colour
- All aluminum Airalu heating element
- Thermal cut-out to prevent overheating
- Double insulation for better safety
- Suitable for zone 2 in bathroom or kitchen
- Temperature setting limiter
- On/Off switch
- Temperature setting dial with Non Frost position
- 3 wires Power cord with black Pilot wire

PROGRAMMING

Tactic is programmable through current carrier without plug but 3 wire power cord. The pilot wire system offers four programmable position : Comfort - Eco - Frost protection and Stop.

Mobile with optional casters kit

RATING (W)	DIMENSIONS W X H X D* (CM)	WEIGHT (KG)	ITEM N°
500	340 x 440 x 104	2.8	A693861
1000	420 x 440 x 104	3.4	A693863
1500	580 x 440 x 104	3.8	A693865
2000	740 x 440 x 104	5.0	A693867
2400	900 x 440 x 104	7.0	A693868



CLASSE II
IP24 IK08

CE (EN/IEC 60335-1-2010)

MONO
230 V

Depth includes the wall mounting bracket - White color (RAL 9016)

YOUR DISTRIBUTOR: